AUTOMATIC DRUM WASHING MACHINE

# USER MANUAL

HMS1460B
HMS1460BS
HMS1260B
HMS1260BS

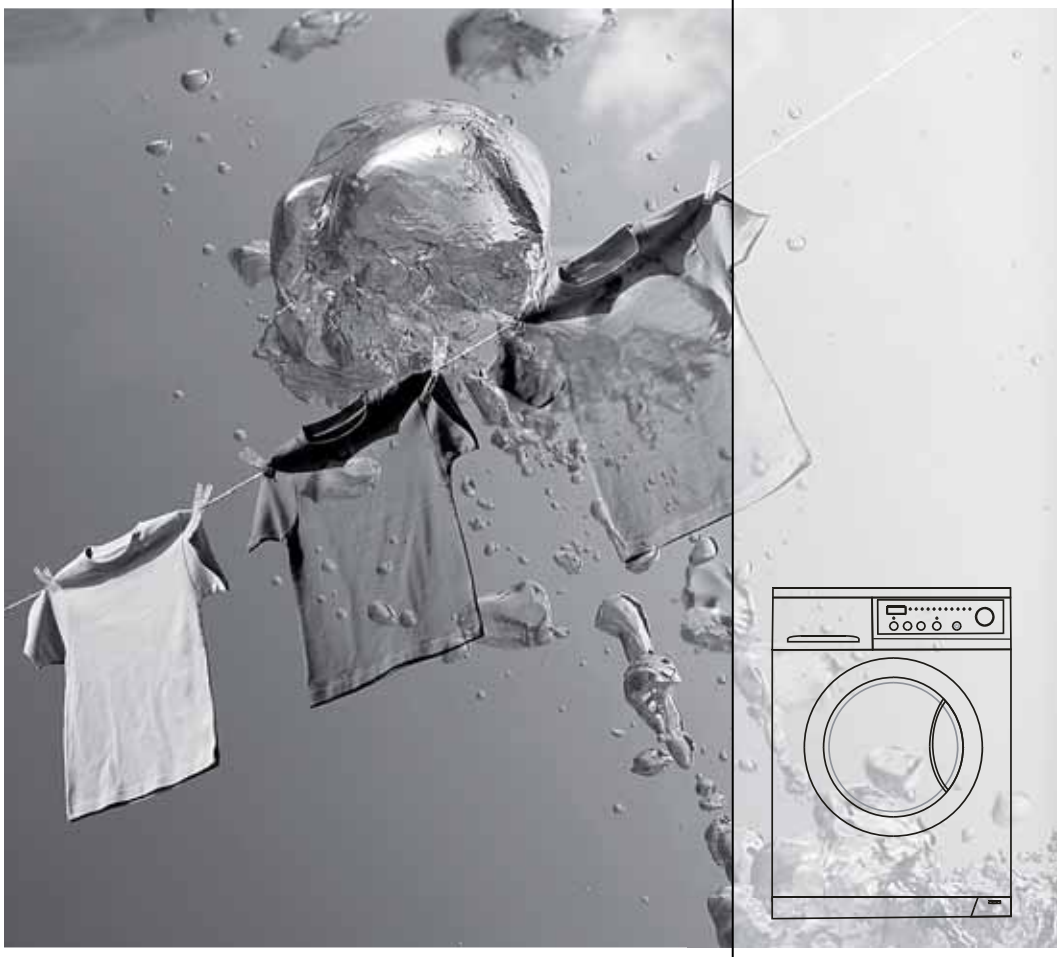

Haier

# TABLE OF CONTENTS


## BEFORE USE

>COMPONENTS ..... 03
>PREPARATION ..... 04
>SAFETY INSTRUCTIONS ..... 05
>INSTALLATION ..... 06
>CONTROL PANEL ..... 08

## USING THE APPLIANCE

>PROGRAM SELECTION ..... 10
>CONSUMPTION AND TECHNICAL DATA .. 11
>WASHING METHODS ..... 12

## MAINTENANCE

>CLEANING & CARE ..... 16
>DISPLAY CODES ..... 18
>TROUBLESHOOTING ..... 19
>IMPORTANT SAFETY INFORMATION ... 20


## LEGEND

☑ Yes

☒ No

☐ Optional

For your safety, any instructions in this manual with this "Warning" sign must be followed strictly.

## DISPOSAL

The symbol on the product or on its packing indicates that this product may not be treated as household waste.Instead it shall be handed over to the applicable collection point for the recycling of electrical and electronic equipment.By ensuring this product is disposed of correctly,you will help prevent potential negative consequences for the environment and human health,Which could otherwise be caused by inappropriate waste handling of this product.For more detailed information about recycling of this product,please contact your local city office,your household waste disposal service or the shop where you purchased the product.

# COMPONENTS

## THANKS FOR PURCHASING A HAIER PRODUCT

Please read these instructions carefully before using this appliance. The instructions contain important information which will help you get the best out of the appliance and ensure safe and proper installation, use and maintenance.

Keep this manual in a convenient place so you can always refer to it for the safe and proper use of the appliance.

If you sell the appliance, give it away, or leave it behind when you move house, make sure you also pass on this manual so that the new owner can become familiar with the appliance and safety warnings.

## ACCESSORIES

Check the accessories and literature

in accordance with this list:

1x Inlet hose assembly

1x Bottom Cover

For HMS1460B/S
HMS1260B/S

1x User manual

1x Drain hose bracket



1x Warranty card (optional)

3x Blanking plugs

# 04 BEFORE USE

## PREPARATION

### PREPARING THE MACHINE



Remove all the packing materials to prevent unsteadiness, including the polystyrene base. Upon opening the package, water drops may be seen on the plastic bag and the porthole. This is normal phenomenon resulting from water tests in the factory.

### DESCRIPTION

This diagram may be slightly different from the layout of the washing machine you have just purchased due to technical improvements.

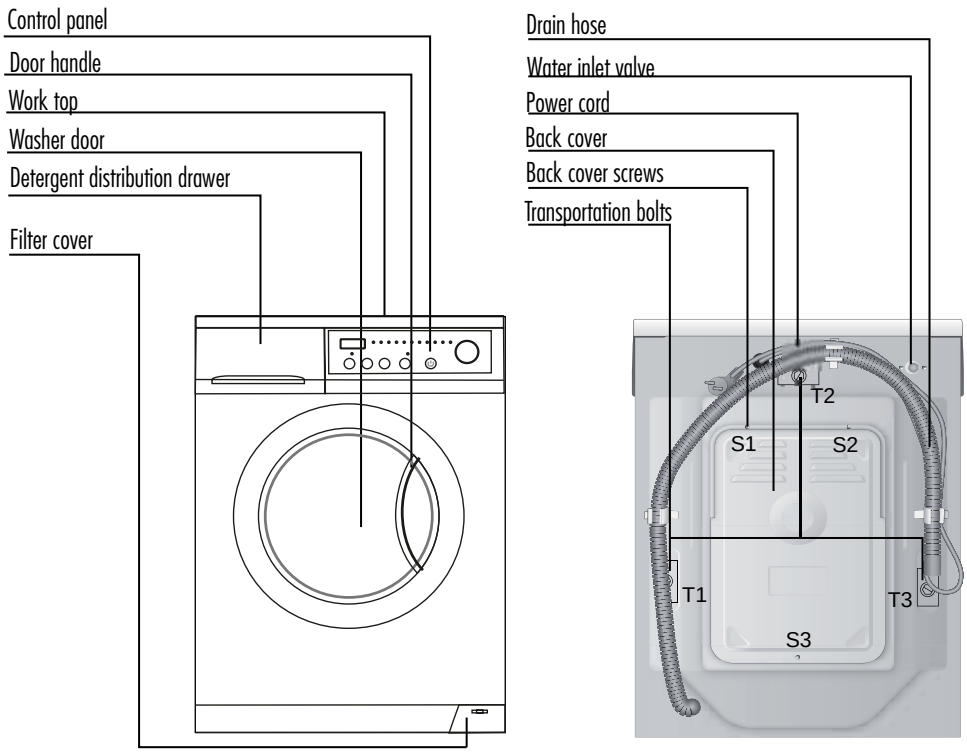

# SAFETY INSTRUCTIONS

## BEFORE SWITCHING THE APPLIANCE ON FOR THE FIRST TIME

DO ...

☑ ... Make sure that the transport bolt are removed.

☑ ... Use a separate earthed socket for the power supply.

☑ ... Make sure that the plug is accessible.

☑ ... Hold the plug and not the electric cable when unplugging the power supply.

☑ ... Make sure that the fuses in the power circuit are rated for 15A.

☑ ... Keep away from heat sources and direct sun light to prevent plastic and rubber components from aging.

☑ ... Make sure that the power cord is not caught under or in the appliance and avoid damage to the power cable.

☑ ... Check that hose joints and connections are firm and no water can leak. If joints are loose or there is leakage, turn off the water supply and refix. Do not use the washing machine until the hoses are properly fixed.

DO NOT ...

☒ ... Touch or use the appliance when barefoot or with wet or damp hands or feet.

☒ ... Use flammable detergent or dry cleaning agent.

☒ ... Use any flammable sprays in close vicinity to the appliance.

☒ ... Remove or insert the plug in the presence of flammable gas.

☒ ... Allow children or infirm persons to play with the appliance or packing materials.

☒ ... Install the appliance outdoors in a damp place, or in an area which may be prone to water leaks such as under or near a sink unit. In the event of a water leak allow the machine to dry naturally.

☒ ... Place the washing machine directly on a carpet, or close to a wall or furniture.

## DURING DAILY USE OF THE APPLIANCE

DO ...

☑ ... Pull up zips and fix loose threads to prevent the items from being entangled. If necessary, put small items into a net bag or pillow.

☑ ... Turn off the machine after each wash program and switch it off at the mains to save electricity and for safety. Wipe clean the lower part of the porthole.

☑ ... Keep the door slightly open when the washing machine is not in use to prevent formation of odours.

☑ ... Let the power cord be replaced by the manufacturer, his service agent or other accordingly qualified persons, in case it is damaged.

☑ ... Ensure that the appliance is not used by persons with reduced physical, sensory or mental capabilities, lack of experience and knowledge without supervision or instruction by a person responsible for their safety.

☑ ... Supervise children to ensure that they do not play with the appliance.

DO NOT ...

☒ ... Touch the washer door during the washing process - it gets hot!

☒ ...Place heavy objects or sources of heat or damp on top of the appliance.

☒ ... Hot wash foam rubber or sponge-like materials.

☒ ... Open the detergent distribution drawer during the wash cycle.

☒ ... Force the washer door open. The door is fitted with a self-lock device and will open shortly after the washing procedure is ended.

☒ ... Open the washer door if the water level is visibly over the porthole.

☒ ... Cover the washing machine with plastic cover so that inside dampness cannot be kept in.

# INSTALLATION

## ADJUSTING THE BOTTOM COVER

When open the shrink package,you will find a calcium plastic board which is laid on the top of washing machine as shown in fig.1.The board is used for reducing noise by pasting it under the cabinet when setting as shown in fig.2. (For HMS1460B/S HMS1260B/S)

Fig.1



Fig.2

## DISMANTLE THE TRANSPORTATION BOLTS

The transportation bolts are designed for clamping anti-vibration components inside of the washing machine during the transportation process.

1. Remove the back cover.
2. Remove the three bolts on the rear side and take out the synthetic stabilisers from within the machine.
3. Replace the back cover.
4. Fill the holes left by the bolts with blanking plugs.

**Note:**

**1.When you replace the back cover,the convexity must face to outside, and you have to insert the back cover from the two gaps as shown in fig.3.**
**2.Keep the transportation bolts and synthetic stabilisers in a safe place for later use.**

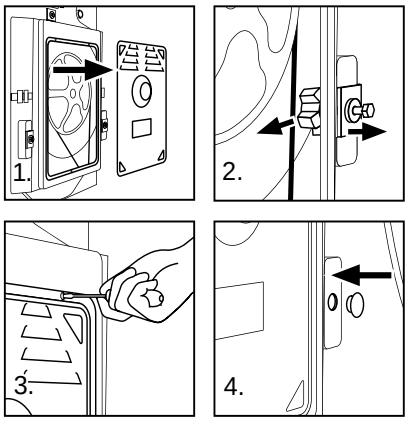




Fig.3

## ADJUSTING THE WASHING MACHINE

There are adjustable feet under the bottom of the washing machine. Before use, they should be adjusted so that the machine is level. This will minimise vibrations and thus noise during use. It will also reduce wear and tear. We recommend using a spirit level to level the appliance.The floor should be as stable and flat as possible.



## INLET HOSE

1. Connect the nut on the inlet hose to the connector on the water valve.

2. Apply inlet hose to a water tap with cold, fresh water.

**Note: Use the hose-set supplied with the appliance. Old hose-sets should not be reused.**

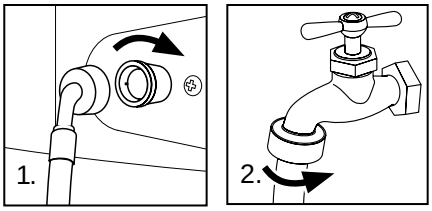


## DRAIN HOSE

1. Use the drain hose bracket to keep the end of the drain hose retained and prevent the outflow of water. Don't extend the length of the drain hose; if an extended hose is required, please consult a serviceman.

2. The height of the drainage outlet must be 80-100 cm. Fix the drain hose to the clip at the back of the washing machine to prevent it from dropping off.

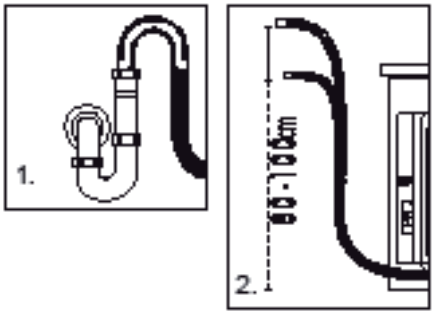


**Note: The drain hose should not be submerged in water and should be securely fixed and leak-free. If the drain hose is placed on the ground or if the pipe is at a height of less than 80cm, the washing machine will continuously drain while being filled (self-siphoning).**

## CONNECTING TO THE POWER SUPPLY

Before connecting to the power supply, check:

¬ The socket is adequate for the maximum power of the washing machine

(For safety, fuses in the power circuit should be rated for no less than 15A).

¬ The voltage should meet the requirement.

¬ The power outlet should be capable of accepting the washing machine plug.

¬ Connect the machine to an earthed socket outlet.



# 08 BEFORE USE

## CONTROL PANEL

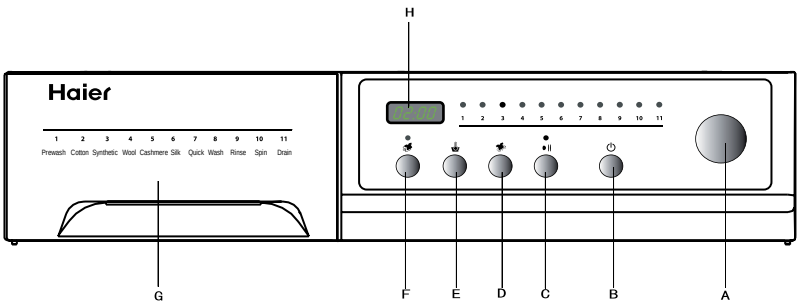


| | | | |
|---|---|---|---|
| **A** | Program knob | **F** | Delay Button |
| **B** | Power Switch | **G** | Detergent distribution drawer |
| **C** | Start/Pause Button | **H** | Display |
| **D** | Spinning Speed Setting Button | **E+F:** | Combination for keyboard lock |
| **E** | Washing temperature button | | |

### OPERATIONAL FUNCTIONS

| | | |
|---|---|---|
| A | ¬ Program knob | _By turning the knob clockwise/counterclockwise, the required program can be selected. There are 11 programs available. After a program is selected, the corresponding light will go on. |
| B | ¬ Power Switch | _ Press this button to switch on the washing machine. Press it again to switch it off. |
| C | ¬ Start/Pause Button | _ When the washing machine is connected to the power socket and a program is selected, lightly touch this button to start operation. During a wash cycle, touch it lightly ,operation will stop and the digits on the screen start blinking. Touch it again to resume operation. To cancel a wash program during a wash cycle, touch this button, when the digits on the screen start blinking, press the Power switch, the program will be cancelled. |
| D | ¬ Spinning Speed Setting Button | _ Touch this button lightly to select the desired speed. When a speed is set, it will be displayed on the screen.<br>**Note: Different water temperatures and spinning speeds can be set for different laundries. Wash using the default settings if there is no special requirement.** |
| E | ¬ Washing temperature button | _ Touch this button lightly, the washing temperature will be displayed on the screen. Select a temperature according to the type of laundry. |

| | | |
|---|---|---|
| F | ¬Delay Button | Touch this button lightly, the washing machine will start operation after a period of time and the corresponding indicator will go on. The range is 0.5-24 hours; each touch of this button increases a half hour. After the button is set, press the Start/Pause button to start countdown of the set time (the time is displayed on the screen until the program ends).<br>**Note:The delay time must be longer than the program time;otherwise,the washing machine will start the wash program directly.** |
| G | ¬ Detergent distribution drawer | _Open the drawer, three compartments can be seen:<br>Compartment 1: Prewash detergent<br>Compartment 2: Detergent for programs 1 to 8<br>Compartment 3: Softener, conditioning agent, perfume, etc.<br>  |
| H | ¬Display | _Information as remaining wash time, temperature and speed setting and error messages will be shown here.<br>**Note: After power is switched on, the display will go on and the remaining wash time decreases. As the water pressure and temperature may differ, the remaining time maybe adjusted accordingly. When the laundry is not balanced during spinning, the time may be automatically prolonged. These are normal phenomena.** |
| E+F | ¬Combination for keyboard lock | E+F: Combination for keyboard lock<br>After a programme is started,press these two keys simultaneously, the sign "LOCK" and the remaining washing time are displayed on the LED alternately. Now all the function keys except the Power switch can be locked. Press the key combination again to cancel this function. |

## PROGRAM SELECTION

### PROGRAM MODES




1 Detergent compartment for prewash mode
2 Detergent compartment
3 Compartment for softener and other additives

| Program | | Temperature Maximum | Preset | 2 | 3 | 1 | Recommended Laundry | Preset spin speed HMS1460B/S | HMS1260B/S |
|---|---|---|---|---|---|---|---|---|---|
| 1 | ¬ Prewash | -- to 90 °C | 40 °C | ☑ | ☐ | ☑ | Heavy soiling | 1000 rpm | 1000 rpm |
| 2 | ¬ Cotton | -- to 90 °C | 40 °C | ☑ | ☐ | ☒ | Cotton fabrics | 1000 rpm | 1000 rpm |
| 3 | ¬ Synthetic | -- to 60 °C | 40 °C | ☑ | ☐ | ☒ | Fast colour synthetic | 1000 rpm | 1000 rpm |
| 4 | ¬ Wool | -- to 40 °C | 40 °C | ☑ | ☐ | ☒ | Woolen fabrics | 600 rpm | 600 rpm |
| 5 | ¬ Cashmere | -- to 40 °C | 40 °C | ☑ | ☐ | ☒ | Cashmere fabrics | 600 rpm | 600 rpm |
| 6 | ¬Silk | -- to 40 °C | 40 °C | ☑ | ☒ | ☒ | Silk fabrics | 400 rpm | 400 rpm |
| 7 | ¬ Quick | -- to 40 °C | 40 °C | ☑ | ☒ | ☒ | Medium-soil | 1000 rpm | 1000 rpm |
| 8 | ¬ Wash | -- to 60 °C | 40 °C | ☑ | ☒ | ☒ | Medium-soil<br>Attention: This program consists only main wash, without rinse and spin. | / | / |
| 9 | ¬ Rinse | -- | -- | ☒ | ☐ | ☒ | Medium-soil | 1000 rpm | 1000 rpm |
| 10 | ¬ Spin | -- | -- | ☒ | ☒ | ☒ | / | 1000 rpm | 1000 rpm |
| 11 | ¬ Drain | -- | -- | ☒ | ☒ | ☒ | / | / | / |

☑ Yes ☒ No ☐ Optional

# CONSUMPTION AND TECHNICAL DATA

## CONSUMPTION TABLE

The wash cycle times are intended as a guide only. The actual time used may vary due to different water pressure, initial water temperature, etc.

| PROGRAM | MAX. LOAD | ENERGY CONSUMPTION | WATER CONSUMPTION | TEMPERATURE | WASHING TIME |
|---|---|---|---|---|---|
| ¬ Prewash | 6 kg | 0.95 kWh | 64L | 40°C | 2:40 h |
| ¬ Cotton*) | 6 kg | 1.14 kWh | 49L | 60°C | 2:58 h |
| ¬ Cotton | 6 kg | 0.50 kWh | 53L | 40°C | 2:22 h |
| ¬ Synthetic | 3 kg | 0.43 kWh | 39L | 40°C | 1:28 h |
| ¬ Wool | 2 kg | 0.42 kWh | 40L | 40°C | 1:08 h |
| ¬ Cashmere | 2 kg | 0.42 kWh | 39L | 40°C | 1:08 h |
| ¬ Silk | 2 kg | 0.55 kWh | 34L | 40°C | 1:02 h |
| ¬ Quick | 3 kg | 0.36 kWh | 36L | 40°C | 0:34 h |
| ¬ Wash | 3 kg | 0.44 kWh | 15L | 40°C | 0:53 h |

*) **EN 60456 test program / Energy label program with Cotton 60°C and max. spin speed.**

## TECHNICAL DATA

| | HMS1460B /HMS1460BS | HMS1260B /HMS1260BS |
|---|---|---|
| Power source | 220 - 240V~/50Hz | 220 - 240V~/50Hz |
| Max. working current (A) | 10 | 10 |
| Water pressure (MPa) | 0.03≤P ≤1 | 0.03≤P ≤1 |
| Nominal load (kg) | 6 | 6 |
| Spinning speed (r/min) | 1400 | 1200 |
| Washing programs | 11 | 11 |
| Max power (W) | 2000 | 2000 |
| Dimensions (HxDxW mm) | 850 x 565 x 595 | 850 x 565 x 595 |
| Net weight (kg) | 68 | 68 |

# WASHING METHODS

This washing machine is for domestic use only. If the machine is use for commercial purpose the guarantee will not be valid anymore.Do not use it for purposes other than that for which it was designed. Follow the instructions given on the label of each garment and wash only machine-washable garments.

## POWER SUPPLY



Connect the washing machine to the power supply (220V to 240V~/50Hz).

## WATER CONNECTION



Turn on the tap. The water must be clean and clear.

**Note: Before use, check for leakage in the joints between the tap and the inlet hose by turning on the tap.**

## PREPARING THE LAUNDRY



¬ Sort out clothes according to fabric (cotton, synthetics, wool or silk) and to how dirty they are.

¬ Separate white clothes from coloured ones. Wash them first by hand to check if they fade or run.

¬ Empty pockets (keys, coins, etc.) and remove the harder decorative objects (e.g. brooches).

**Attention: Small parts (like buttons, etc) may lead to repair work which user has to pay by themselves and can cause damage in the machine.**



¬ Garments without hems, underwear, finely woven textile such as fine curtains are to be put into wash bag (it is better not to wash them in a washing machine).

¬ Close zippers and hooks, make sure the buttons are sewn on tightly and place small items such as socks, belts, bras, etc. in the wash bag.

¬ Unfold large pieces of fabric such as bed sheets, bedspreads, etc.

¬ Turn shirts inside out.

## LOADING THE MACHINE



Open the washer door, put in the laundry piece by piece. Close the door tightly.

¬ When first using the washing machine, let it run unloaded for one program to prevent the laundry from being tainted by oil or dirty water from the washing machine. Before washing you should run the machine without laundry, but with detergent, with 60°C program.

¬ Do not overload the washing machine.

## SELECTING DETERGENT



The washing efficiency and the performance is determined by the quality of detergent used. Special non-foaming detergent produces good washing results. Use specific detergents for synthetic and woollen goods. Do not use dry cleaning agents such as trichloroethylene and similar products.

**Note: Do not add more detergent than needed. Please follow the dosage recommendation on the detergent package.**

## ADDING DETERGENT




Slide out the detergent drawer and put the required detergent and softening agent into the corresponding compartments. Push back the drawer gently. (Refer to the instructions on the drawer)

**Caution:**

**¬ For prewashing program, detergent should be added to both compartments 1 and 2. For other programs, do not add detergent to compartment 1.**

**¬ Use liquid detergent according to the instructions on its package. Do not use liquid detergent if the prewash mode or "Start delay" is selected.**

**¬ Do not overuse softener; otherwise, it will damage the artificial fibers.**

## SELECTING PROGRAM



To get the best washing results, an appropriate washing program should be selected according to the laundry type. There are instructions on the handle of the detergent distribution drawer. Please turn the program knob to select the right program.

## SELECTING FUNCTIONAL

Select the required options. (Refer to the "Control panel" pages 06 and 07)

## SETTING WASHING TEMPERATURE

Press and hold down the temperature button until the desired temperature is selected or the symbol "--" for no water heating.



## SETTING SPIN SPEED

Press and hold down the speed button until the desired speed is selected or the symbol "0" is selected for no spin. See "Operational functions" on the "Control panel" pages (06 and 07) for selecting temperature and spin speed. It is advisable to select the recommended value.



## WASHING

Press the Start/Pause button. The washing machine will operate according to the preset programs. The washing machine will stop operation automatically when a washing cycle ends. The "End" sign will appear on the display. Open the washer door and take out the laundry.



## AFTER WASHING

Turn off the water supply and unplug the power cord. Open the washer door to prevent formation of moisture and odours. Let the door open while not used.



## TIPS FOR SAVING ENERGY

1. Collect clothes for one full wash load.
2. Avoid overloading the washing machine.
3. Prewash only heavily soiled clothes.
4. Reduce the amount of detergent or choose standard or delicate wash programs for slightly soiled clothes.
5. Choose a proper washing temperature. Modern detergents can wash with very good result already in lower temperature than 60°C. Only use higher temperature than 60°C for heavily soiled laundry.
6. Follow the dosage recommendation on the detergent package to avoid using too much detergent.

## CARE CHART

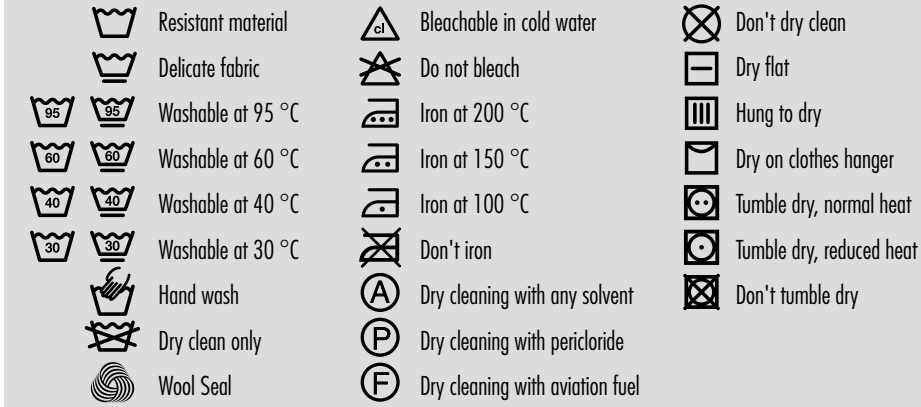


## LOAD REFERENCE

| | | |
|---|---|---|
| Bed sheet (single) | Cotton | Approximately 800g |
| Blanket | Wool | Approximately 3000g |
| Blended fabric clothes | / | Approximately 800g |
| Jackets | Cotton | Approximately 800g |
| Jeans | / | Approximately 800g |
| Overalls | Cotton | Approximately 950g |
| Ladies Pyjamas | / | Approximately 200g |
| Shirts | / | Approximately 300g |
| Socks | Blended fabrics | Approximately 50g |
| T-Shirts | Cotton | Approximately 300g |
| Underwear | Blended fabrics | Approximately 70g |

## CLEANING & CARE

### AFTER WASHING

Turn off the water supply and pull out electricity plug after each wash. Open the washer door to prevent formation of moisture and odours. If the washing machine is left idle for a long period, drain the water in the machine and replace the drain hose.







### CLEANING THE DETERGENT DRAWER

Clean the detergent distribution drawer regularly.

Swing out the drawer, flush it clean with water and then replace it.




### CLEANING THE MACHINE

Unplug the machine during cleaning and maintenance. Use a soft cloth dampened with soap liquid to clean the machine case and rubber components. Do not use organic chemicals or corrosive solvents.

### CLEANING THE FILTER

Clean the filter once a month:

1. Open the bottom cover.

2.Remove the filter by turning counterclockwise.

3.Flush the filter clean with running water.

4.Replace the filter by turning clockwise and remount the cover.













**Caution:**

**1.The filter must be in place, or it may lead to leakage.**

**2.Place a container under the drain pump filter, to collect any excess water that may come out of the drain pump when the filter is removed.**

## WATER INLET VALVE AND INLET VALVE FILTER

To prevent blockage to the water supply by ingress of foreign substances, clean the water inlet valve and inlet valve filter regularly.



## MOVING THE MACHINE

If the machine is to be moved to a distant location, replace the transportation bolts removed before installation to prevent damage as shown below.

1. Remove the blanking plugs.
2. Remove the back cover
3. Insert the synthetic stabilisers and the transportation bolts.
4. Tighten the bolts with a spanner.
5. Replace the back cover.

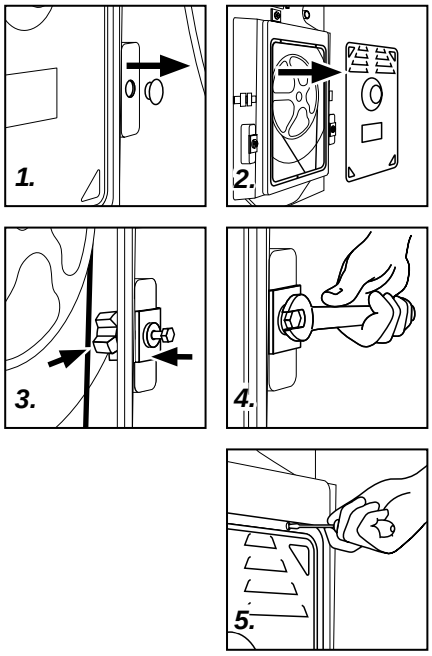


## LONG PERIODS OF DISUSE

If the washing machine is left idle for a long period, pull out the electrical plug and turn off the water supply. Open the washer door to prevent formation of moisture and odours. Let the door open while not used.



# DISPLAY CODES

## DISPLAY CODES AND SPECIAL FUNCTIONS

| CODES | CAUSES | SOLUTIONS |
|---|---|---|
| Err1 | ¬ Door is not properly shut. | _ Shut the door properly. |
| Err2 | ¬ Drainage error, water not emptied within 4 minutes. | _ Clean the filter and check the drain hose for blockage. If error still exists, please contact the maintenance personnel. |
| Err3 | ¬ Temperature sensor not properly connected or damaged. | _ Contact the maintenance personnel. |
| Err4 | ¬ Heater error (Appears at the end of a cycle). | _ Reduce load and then start washing again. If problem still exists, please contact the maintenance personnel. |
| Err5 | ¬Water level not met in 8 minutes.<br>¬The height of the drain hose is below 80 cm.<br>¬ The drain hose is in water. | _ Make sure that tap is turned on, and water pressure is normal. If problem still exists, please contact the maintenance personnel.<br>_ Install drain hose within 80-100 cm of height.<br>_ Make sure the drain hose is not in water. |
| Err7 | ¬ Motor overheat protection or damage. | _ Contact the maintenance personnel. |
| Err8 | ¬ Water exceeds protective level. | _ Contact the maintenance personnel. |
| End | ¬ End of wash cycle. | |
| 1:25 | ¬The remaining time is 1 hour 25 minutes. | |
| unb | After the last rinsing cycle finishes,spining fails completely due to animbalance of the laundry | |

¬ Control panel lock function: Press the "Delay" and the "Temperature" buttons simultaneously for 3 seconds after starting a program. It can no longer be changed by operating buttons or knobs. To unlock press the "Delay" and "Start/Pause" buttons again for 3 seconds.

¬ Power-off memory function: In case of abrupt power failure or the need to cut off the power during a program cycle, the present settings will be saved and the preset operation will resume when the power is on again.

¬ To cancel a program

Press the "Start/Pause" button, then switch off the power and the program is automatically cancelled. Turn the program selector again to choose another program.

# TROUBLESHOOTING

## TROUBLESHOOTING

The following circumstances do not constitute problems. Do not contact the Service Center until the problem has been confirmed.

| PROBLEM | CAUSES | SOLUTIONS |
|---|---|---|
| Washing machine fails to operate. | ¬ Poor connection to the power supply.<br>¬ Power failure.<br>¬ The washer door is not properly closed.<br>¬ Machine has not been switched on. | _ Check connection to the power supply.<br>_ Check the power supply.<br>_ Close the washer door properly.<br>_ Make sure the machine is switched on. |
| Washing machine cannot be filled with water. | ¬ The "Start/Pause" button is not pressed.<br>¬ Water tap is not turned on.<br>¬ Water pressure is less than 0,03 Mpa.<br>¬ The inlet hose is kinked.<br>¬ Water supply failure.<br>¬ The program knob is not properly set.<br>¬ The washer door is not properly closed.<br>¬ The inlet hose filter is blocked. | _ press the "Start/Pause" button.<br>_ Turn on the water tap.<br>_ Check water pressure.<br>_ Check the inlet hose.<br>_ Ensure the water supply.<br>_ Set the program knob properly.<br>_ Close the washer door properly.<br>_ Unblock the inlet hose filter. |
| Machine is draining while being filled. | ¬ The height of the drain hose is below 80 cm.<br>¬ The drain hose is in water. | _ Install drain hose within 80-100 cm of height.<br>_ Make sure the drain hose is not in water. |
| Drainage failure. | ¬ Drain hose is blocked.<br>¬ Drain hose end is higher than 100 cm above the floor level.<br>¬ The filter is blocked. | _ Unblock the drain hose.<br>_ Make sure the drain hose end is lower than 100 cm above floor level.<br>_ Unblock the filter. |
| Strong vibration while spinning. | ¬ Not all transportation bolts have been removed.<br>¬ Washing machine is located on an uneven surface or is not level.<br>¬ Machine load is over 6 kg. | _ Remove all transportation bolts.<br>_ Make sure the washing machine is on an even surface and levelled.<br>_ Reduce amount of laundry in the drum. |
| Operation stops before completing wash cycle. | ¬ Water or electricity failure. | _ Check the power supply. |
| Operation stops for a period of time. | ¬ Washing machine gives an error message. | _ Check display codes. |
| Excessive foam in the drum, which is spilled to the distribution drawer. | ¬ The detergent is not a low-foaming type or for manual wash.<br>¬ Excessive use of detergent. | _ Check if your detergent is appropriate.<br>_ Reduce amount of detergent in the distribution drawer. |
| Automatic adjustment of the washing time. | ¬ The washing program duration will be adjusted according to the initial water temperature. | _ This is normal and doesn't affect the functionality. |
| Spinning fails | ¬ Unbalance of the laundry | _ Add clothes or run a spinning program again. |

## IMPORTANT SAFETY INFORMATION

Do not use a multiple socket extension cord. A separate earthed socket is required which shall be accessible at all times.
If the cord becomes damaged, it should be replaced by the manufacturer, its service agent or similarly qualified person.
Never remove the plug from the socket by pulling on the cord, always grasp the plug.
The door may get hot during use, keep children away whilst the machine is operating.
Never open the detergent drawer while the machine is running.
When installing the product, make sure the mains cord is not trapped or twisted.
WARNINGS:
THIS APPLIANCE IS INTENDED FOR DOMESTIC USE ONLY, COMMERCIAL OR ANY OTHER
USE MAY INVALIDATE THE WARRANTY AND MIGHT BE DANGEROUS.
Never touch or operate the machine with wet hands or when bare footed.
Do not put the machine on a carpet that can block the ventilation slots on the bottom of the unit.
Do not install this machine outdoors or in a damp place.
Do not install this product near a heat source or in direct sunlight.
Do not place any object on the machine when it is operating.

Caution
To prevent electric shock disconnect from
the main before removing the cover

Warning: This appliance must be earthed.
The appliance must be connected to a 220-240 volts 50 cycle AC supply by means of a three pin socket, suitably earthed and should be protected by a 13 amp fuse in the plug.
The appliance is supplied with a standard 13 amp 3-pin plug fitted with a 13-amp fuse. Should the fuse require replacement, it must be replaced with a fuse rated at 13 amps and approved to BS1362.
If the mains plug is unsuitable for the socket outlet in your home or is removed for any other reason,then the cut off plug should be disposed of safely, do not insert the cut off plug into a mains outlet to prevent the hazard of electric shock. Remove the fuse before disposal.
There is a danger of electric shock if the cut off plug is inserted into any 13-amp socket outlet.
How to wire a 13 amp plug. (UK Only)
The wires in the mains lead on this appliance are coloured in accordance with the following code:
Green and Yellow - Earth Blue – Neutral Brown – Live
As the colours may not correspond with the markings identifying the terminals in your plug proceed as follows.
The green and yellow wire must be connected to the terminal in the plug which is marked with the letter E or with the earth symbol or coloured green and yellow.
The blue wire must be connected to the terminal marked N.
The brown wire must be connected to the terminal marked L.
You must make sure the lead is firmly secured under the cord clamp.




WATER CONNECTION
The product should be connected to the water main using new hose sets, old hose sets should not be reused.
The water pressure must not be less than 0.03MPa.

Haier

Haier Europe Trading S.r.l.
Via De Cristoforis 12
21100 Varese - Italy

Tel + 39 0332 24511
Fax +39 0332 245146
E-mail het.srl@haiereurope.com